

WALL OF XV

THERMAL
METAL
CLASSIC
CEMENT
STONE
WOOD
CONCRETE
BRICK
BETON
STYLE
KITCHEN

'Next generation walls'

ACRYLIX

WALL OF WOOD




BRICK



CONCRETE



STONE


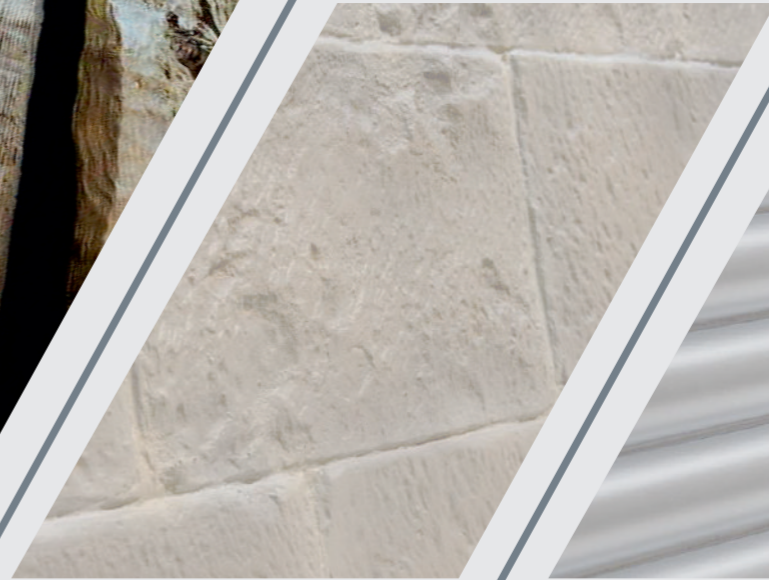


METAL



LIGHT
Lightweight and easily transportable


HEALTHY
Unhealthy gas spring

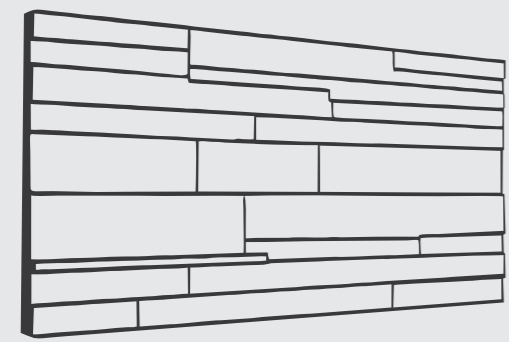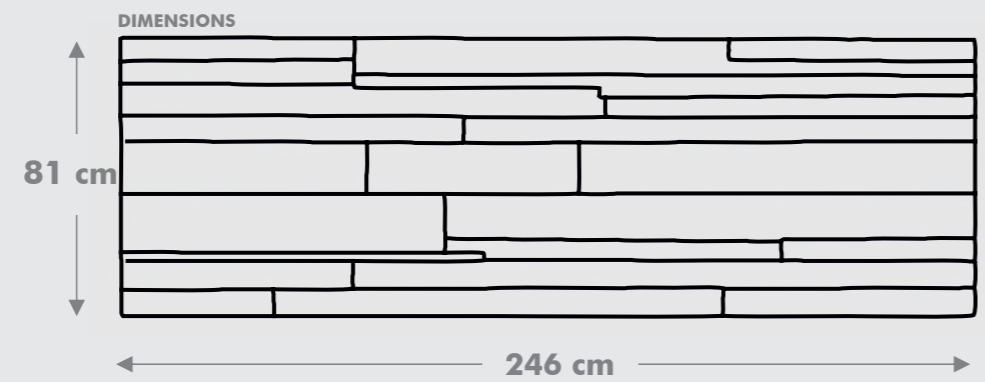

PANEL THICKNESS DEPTH
3 mm / 15 mm


WEIGHT 6,5 kg/m² **DENSITY** 1600 kg/m³

COVERAGE AREA DEPTH
2 m² /panel

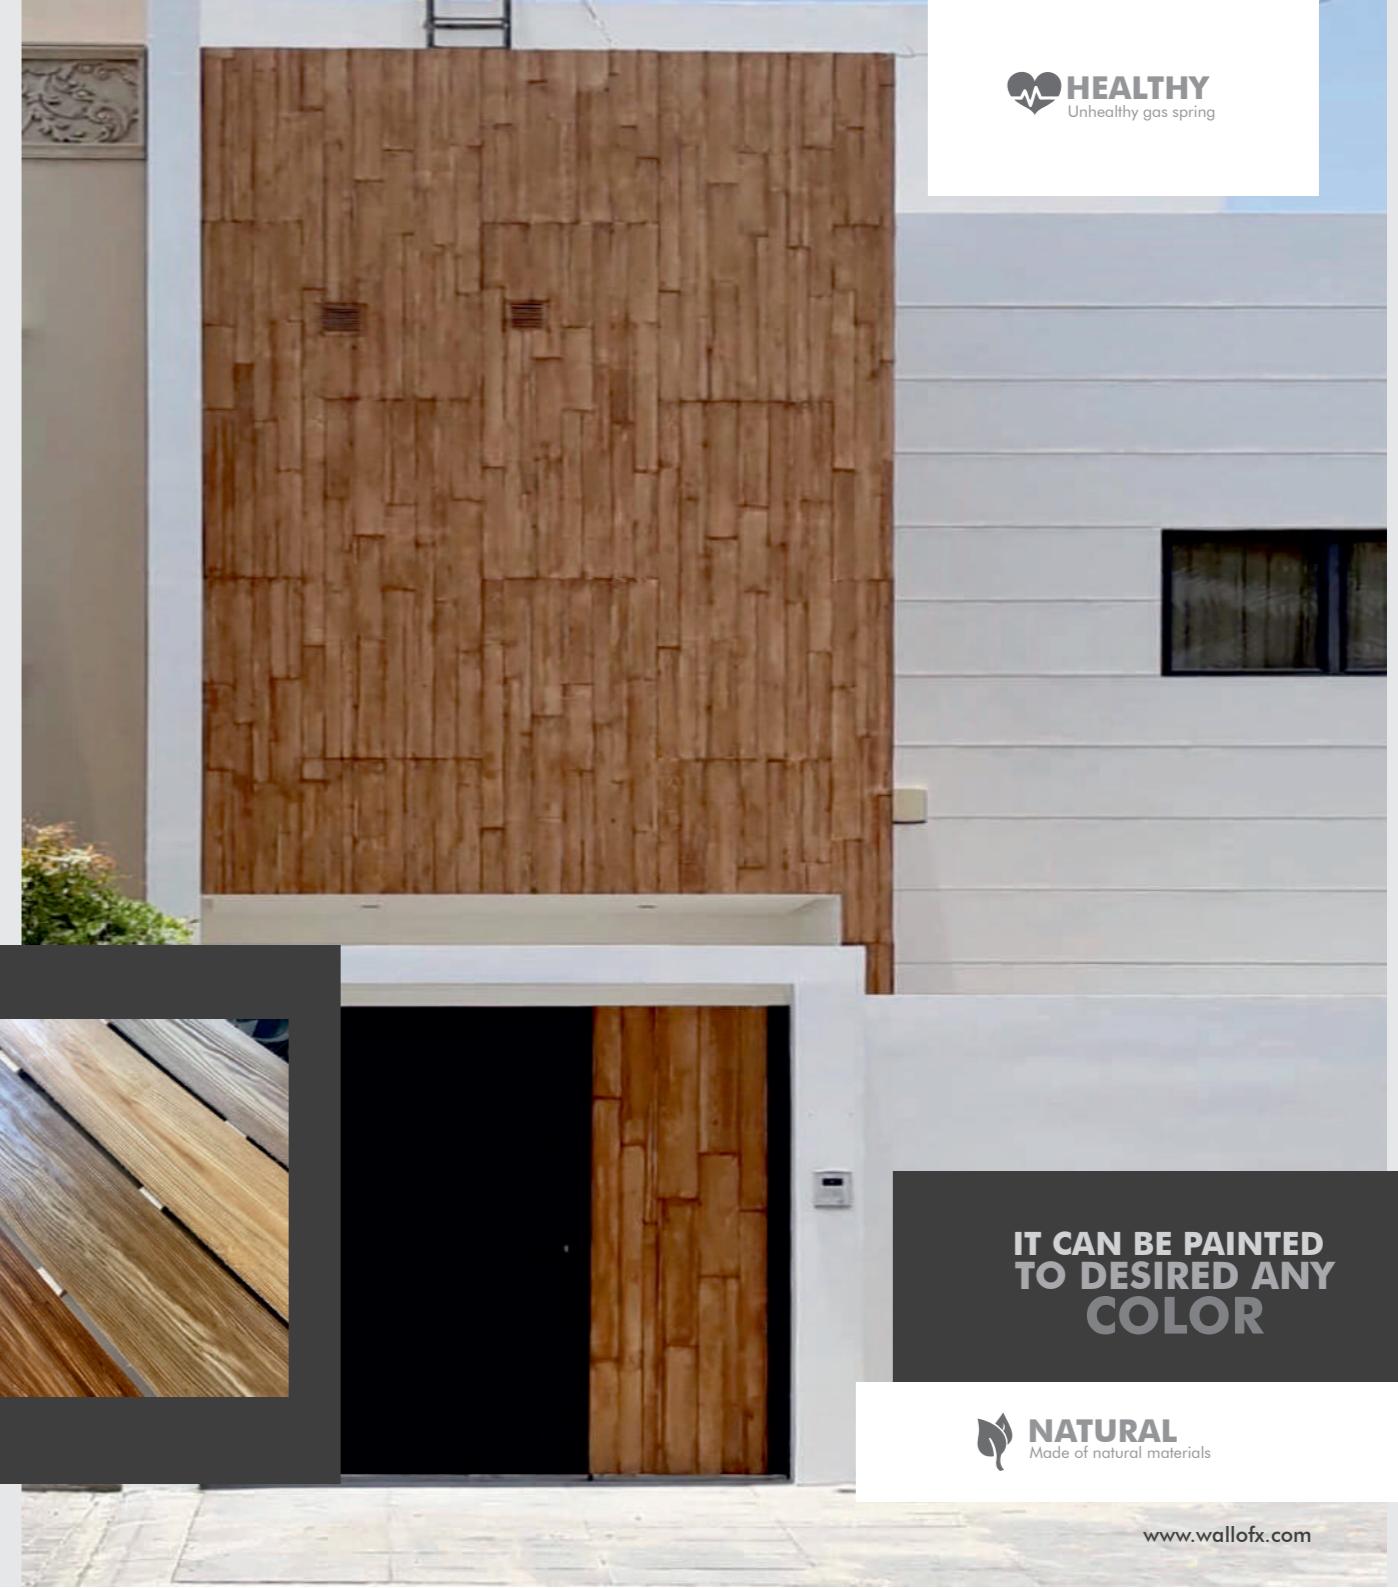

WOOD

MASTIC PUTTY IS USED AT THE JOINTS OF THE PANELS AND TO CLOSE THE SCREW HEAD

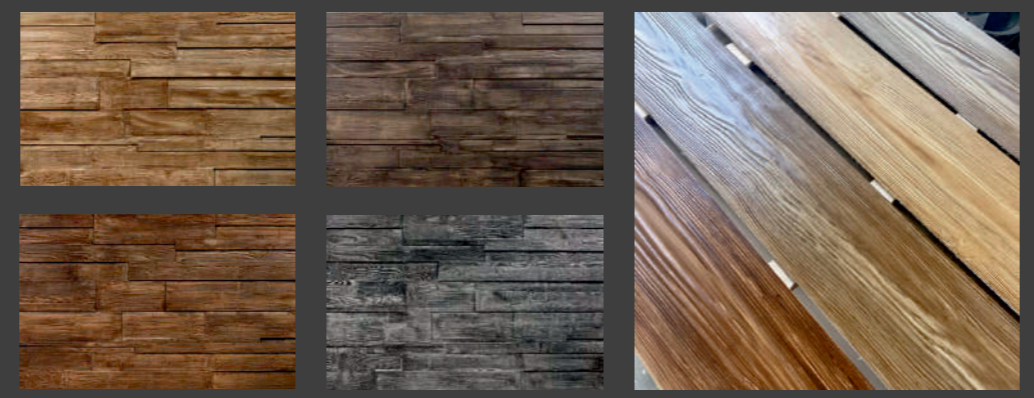

EASY MONTAGE
Can be installed quickly and easily

IT CAN BE PAINTED TO DESIRED ANY COLOR

NATURAL
Made of natural materials



NON FLAMMABLE
Very resistant to burns



ENVIRONMENTALLY FRIENDLY
Made of recyclable material

www.wallofx.com